

SONY®

MONOCHROME BLOCK CAMERA

FCB-EX45M FCB-EX45MCE

Component/OEM



OUTLINE

Sony's new FCB-EX45M/EX45MCE black-and-white block camera is the first black and white block camera to join the FCB series. This camera is especially suited for security dome, traffic monitoring, airline security and facial recognition applications. Incorporating a 1/4 type B/W EXview HAD CCD™, the FCB-EX45M/EX45MCE achieves an excellent sensitivity of less than 0.01 lux – making it ideal for extremely low-light environments. Featuring a high-performance Digital Signal Processor (DSP), the FCB-EX45M/EX45MCE camera realizes a high resolution of 520 TV lines and is equipped with an 18x optical zoom lens. In addition, the FCB-EX45M/EX45MCE inherits many popular functions found in the FCB-EX series, such as Spot AE, Privacy Zone Masking, quick camera control via a high-speed serial interface (max. 38.4 kb/s) and customizable settings. By combining superb picture quality and a variety of convenient (functions usually found in Sony's color block cameras), the FCB-EX45M/EX45MCE camera is a remote controllable black and white solution.

FEATURES


- 1/4 type EXview HAD CCD
 - FCB-EX45M: 380,000 pixels (EIA)
 - FCB-EX45MCE: 440,000 pixels (CCIR)
- Extremely low minimum sensitivity - 0.01 lux (typical)
- High horizontal resolution - 520 TV lines
- 216x zoom ratio (18x optical, 12x digital)
- Spot AE
 - The AE area is selected from one of the 16 vertical/ 16 horizontal blocks of the image to optimize brightness within the desired area.
- Privacy Zone Masking
 - Unwanted areas of an image can be masked and not captured. The masking area can be applied to any of 12 vertical and 16 horizontal masking blocks, and up to six block positions can be selected together.
- High-speed serial interface (max. 38.4 kb/s) and TTL signal-level control (VISCA™ protocol)
- Various customizable settings
- Internal/External sync
- Low power consumption – min. 1.5 W (with motors inactive)
- Lead-free solder mounting board

SPECIFICATIONS

	FCB-EX45M	FCB-EX45MCE
Image sensor	1/4 type EXview HAD CCD	
Number of effective pixels (H x V)	768 x 494	752 x 582
Signal system	EIA	CCIR
Lens	18x zoom f=4.1 mm (wide) to 73.8 mm (tele), F1.4 to F3.0	
Digital zoom	12x (216x with optical zoom)	
Angle of view (H)	48° (wide end) to 2.7° (tele end)	
Minimum working distance	35 mm (wide end), 800 mm (tele end)	
Sync system	Internal/External (V-Lock)	
Minimum illumination	Less than 0.01 lux at 1/60 s (50 IRE)	Less than 0.01 lux at 1/50 s (50 IRE)
S/N ratio	More than 50 dB	
Horizontal resolution	520 TV lines	
Electronic shutter	1/60 to 1/10,000 s, 16 steps	1/50 to 1/10,000 s, 16 steps
Gain	Auto/Manual (-3 to 28 dB, 2 dB steps)	
AE control	Auto, Manual, Priority mode, Bright, EV compensation, Back-light compensation	
EV compensation	-10.5 to +10.5 dB (1.5 dB steps)	
Backlight compensation	On/Off	
Privacy zone masking	On/Off	
On screen display	Title, Privacy Zone Block	
Flicker cancel	Auto	—
Focusing system	Auto (Sensitivity: H, L), One-Push AF, Manual, Infinity, Interval AF, Zoom Trigger AF	
Picture effects	Nega art	
Camera operation switch	Zoom tele, Zoom wide	
Video output	VS: 1.0 Vp-p (sync negative)	
Camera control interface	VISCA Protocol (TTL signal level)	
Storage temperature	-20°C to 60°C (-4°F to 140°F)	
Operating temperature	0°C to 50°C (32°F to 122°F)	
Power consumption	6 to 12 V DC/1.5 W (typical) (motors inactive), Less than 2.2 W (typical) (motors active)	
Mass	Approx. 230 g (8.1 oz)	
Dimensions	50 x 57.5 x 88.5 mm (2 x 2 3/8 x 3 1/2 inches)	

* When used continuously for more than 24 hours, it is recommended to initialize the lens system every 24 hours to extend the life of the lens.
The Initialize Lens command takes a little less than 3 seconds to initialize the focus and zoom.

DIMENSIONS

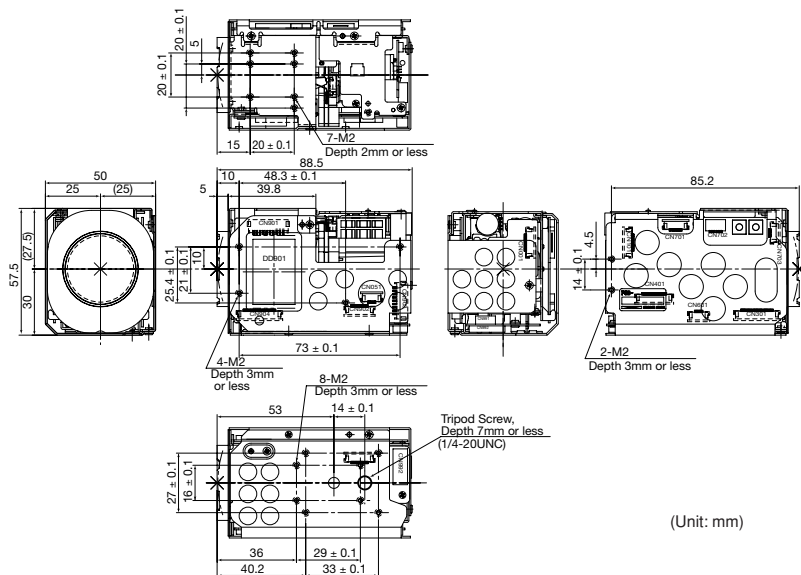

PIN ASSIGNMENT

CN901

Pin No.	Name	Level
1	RxD	CMOS 5.0 V (low: max. 0.8 V, high: min. 2.0 V)
2	TxD	CMOS 5.0 V (low: max. 0.1 V, high: min. 4.4 V)
3	GND (for RxD & TxD)	
4	DC IN	9.0 V ± 3.0 V
5	GND (for DC IN)	
6	VS OUT	1.0 V ± 0.2 V
7	GND (for VBS OUT)	
8	V LOCK PULSE	External VD-Lock Pulse (EX.FV: Negative, 3.0 Vp-p 50% duty)
9	GND (VL PULSE)	

Connector: ELCO 00 6200 509 13000

● Sony Electronics Inc. (USA) HQ

1 Sony Drive Park Ridge, NJ 07656

(TEL:+1-800-686-7669)

● Sony of Canada Ltd. (CANADA)

115 Gordon Baker Rd, Toronto, Ontario M2H 3R6

http://www.sony.com/videocameras

● Sony Broadcast & Professional Europe HQ

Schipholweg 275 1171 PK Badhoevedorp The Netherlands

(TEL:+1-416-499-1414) (FAX:+1-416-497-1774)

(TEL:+31-20-44-99-351) (FAX:+31-20-44-99-333)

http://www.sony-vision.com

Germany

Hugo-Eckener-Strasse 20 D-50829 Köln

(TEL:+49-221-537-8923) (FAX:+49-221-537-491)

France

16-26 rue Morel 92110 Clichy

(TEL:+33-1-55-90-41-58) (FAX:+33-1-55-90-42-20)

UK

The Heights, Brooklands, Weybridge, Surrey KT13 0XW

(TEL:+44-990-331122) (FAX:+44-1932-817011)

Nordic

Per Albin Hanssons vag 20 S-214 32 Malmo Sweden

(TEL:+46-40-190-800) (FAX:+46-40-190-450)

Italy

Via Galileo Galilei 40 I-20092 Cinisello Balsamo, Milano

(TEL:+39-02-61-83-84-26) (FAX:+39-02-618-38-402)

© 2002 Sony Corporation. All rights reserved.

Reproduction in whole or in part without written permission is prohibited.

Design, features and specifications are subject to change without notice.

All non-metric weights and measures are approximate.

Sony is a registered trademark of Sony Corporation.

EXview HAD CCD and VISCA are trademarks of Sony Corporation.